

MS8-C



MS8-LR



CEDIA[®]
MEMBER

NEW 09/2025

MAIN SPEAKERS




MS8-C/LR

The MS8-C/LR is a compact main speaker designed for maximum installation flexibility. Its semi-in-wall design strikes a balance between installation depth and frontal visual footprint. The precision-engineered 8" woofer and 1" tweeter deliver impressive performance for the dynamic and engaging action.

The MS8-C, a dedicated center channel speaker, pairs seamlessly with the MS8-LR left and right speakers.

The MS8-C/LR has a semi-in-wall design that strikes a balance between installation depth and frontal visual footprint. This design allows the loudspeaker to be fully integrated into a wall, successfully enhancing the elegance of the installation.

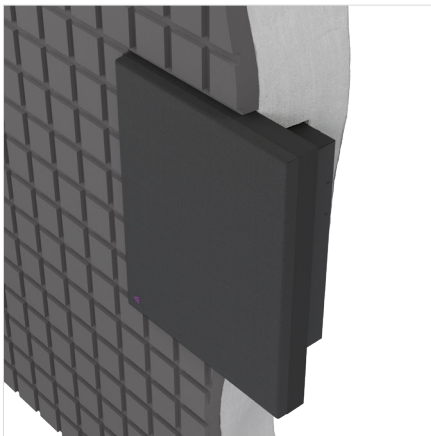

	MS8-C	MS8-LR
Frequency response (± 3 dB)	75 – 20000 Hz	
Frequency range (-10 dB)	65 – 22000 Hz	
Max continuous SPL	118.5 dB	
Sensitivity (1W/1m half-space)	95.5 dB	
High-frequency driver	1-inch (1.75-inch voice coil) titanium dome	
Low/Mid frequency woofer	8-inch (2 inch voice coil), 2-wave long excursion suspension	
Nominal impedance	4 Ohm	
Power rating	200 W	
Connectors	Phoenix terminals	
Coverage	90° H / 50° V rotatable coverage pattern	-30 to +60° H / 50° V rotatable coverage pattern
Mounting	16 × M6 semi in the wall	
Dimension (W × H × D)	496 × 580 × 157 mm / 19.53" × 22.83" × 6.18"	
Dimension (W × H × D) with grill	496 × 580 × 170 mm / 19.53" × 22.83" × 6.69"	
Net weight	8 kg / 17.6 lbs	